


POWERVAL®



GENERAL DESCRIPTION

Breaking capacity	2000 A
Voltage rating	32 V
Ambient temp. + overheating	-40 °C to +125 °C
Body material	PA6T/66-GF30 V0
Blade material	See table below
Blade coating	Tin plated
Rivets material	Copper
Mounting screw	M8
Tightening torque	12±1 Nm
Vibration class compliant with	ISO 16750-3 Test IV
Compliant with	ISO 8820-5 (SF 51 fuse link dimensions) REACH, RoHS

OVERALL DIMENSIONS

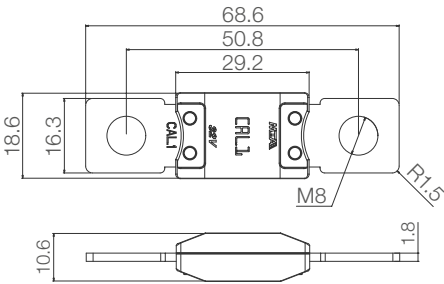

Dimensions in mm

RATINGS

Size	Color coding	Blade material	Expected voltage drop [mV]	ISO cable size [mm²]	I²t* [A²s]	Average cold resistance** [mΩ]
CAL.1	Grey	Zinc alloy	22 (at 150 A)	16	560000	0.2
CAL.2	Black	Zinc alloy	24 (at 150 A)	25	564000	0.2
CAL.3	Red	Copper	30 (at 150 A)	50	392000	0.2
CAL.4	Brown	Copper	35 (at 180 A)	50	564000	0.2
CAL.5	Wheat Grey	Copper	30 (at 180 A)	50	792000	0.1

*Calculated from breaking capacity test


**At ambient temperature = 23 ±1 °C

MELTING TIME AND CURVE

Operating time, typical value [s]:

I [A]	CAL.1	CAL.2	CAL.3	CAL.4	CAL.5
400	70	–	–	–	–
430	–	100	–	–	–
530	–	–	110	–	–
600	4.5	6.0	–	80	–
700	–	–	–	11.5	70
750	–	–	3.0	–	–
800	1.4	1.6	–	2.4	13
1000	0.75	0.80	0.80	0.86	2.5
1200	0.45	0.53	0.45	0.50	1.0

Melting time graph at 23°C on test module ISO

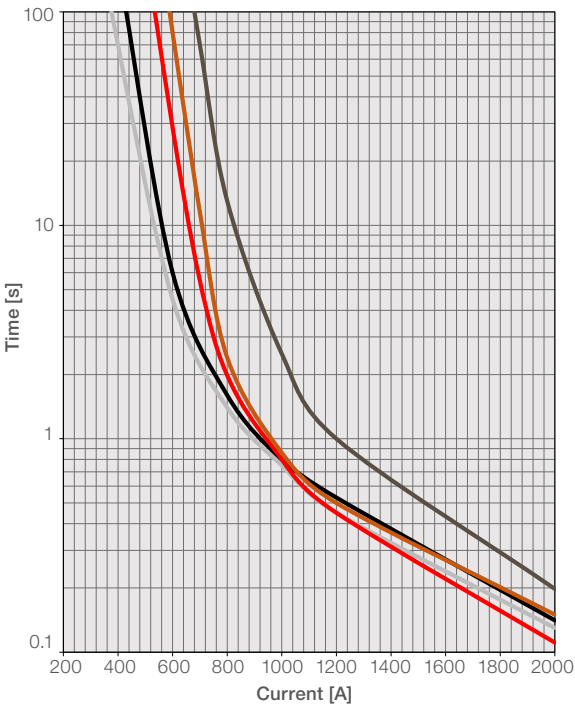

Products, information, drawings, specifications and reference numbers (hereafter “contents”) discussed herein are for reference purposes only. All contents herein are provided on an “as is” basis, without warranties of any kind. The contents discussed herein remain the sole and exclusive property of MTA S.p.A. and shall not be copied, translated in whole or in part without MTA S.p.A. prior written consent. No license of any patent, copyright, mask work, trademark or any other intellectual property right is granted under this document, by implication, estoppel or otherwise. Contents may be modified and changed by MTA S.p.A. without any notice. For updates or additional information about MTA products, please contact your nearest MTA office. All brand names, trademarks and registered trademarks belong to their respective owners.